


## 690-400 TYPE CONTACTLESS AUTO 2D SHUTTLE

# 690-400 型无接触供电双向穿梭车 (RCS690-400DFA3N)

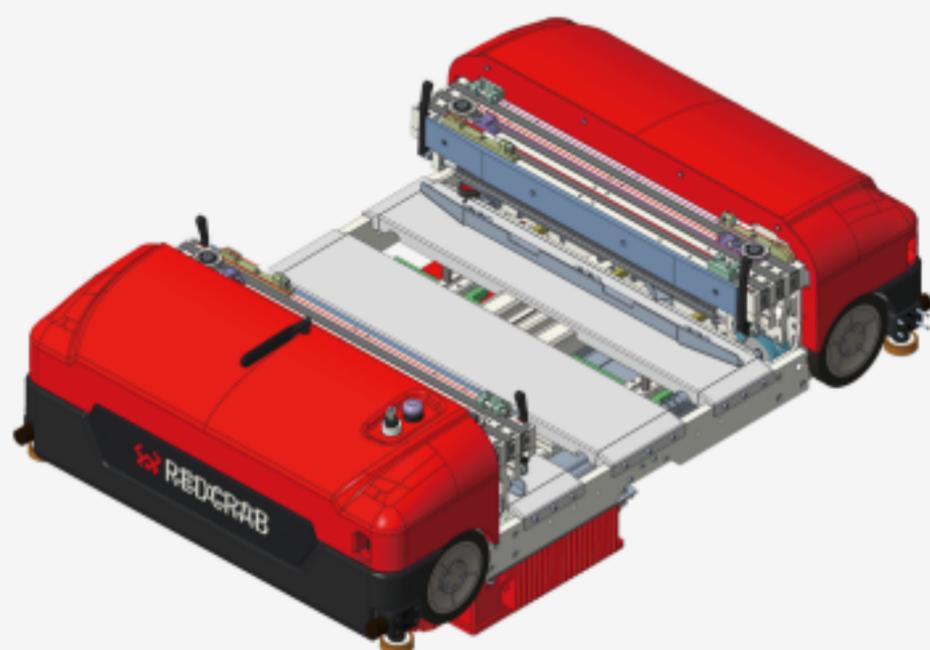

## Characteristics / 产品特征

- 采用无接触供电技术，随用随供、无摩擦、无噪音、无安全隐患、无污染、免维护。特别适合于洁净车间，防爆车间等特需场合  
Contactless power supply reduces friction, noise, and maintenance needs, while enhancing safety and cleanliness. Suitable for explosion-proof, clean and other special workspace environments
- 采用双深位设计，结构紧凑、巷道窄、空间利用率高  
Compact yet robust design and equipped with double deep fork maximising storage density
- 采用轻量化设计，能耗低、加速性能优越  
Light weight, energy efficient and short acceleration time

## Technical Data / 产品参数

参数名称 Parameter Name	单位 unit	数值 Data
外形尺寸:长×宽×高 Dimensions: Length×Width×Height	mm	1168×758×338.5
额定载荷 Rated Load	kg	50
最大运行速度 Max. Speed	m/s	5
最大运行加速度 Max. Acceleration	m/s <sup>2</sup>	2
货叉伸缩最大速度 (空载/带载) Max. Speed of Cargo Fork (No-Load/Loaded)	m/s	1/0.5
货叉最大加速度 (空载/带载) Max. Acceleration of Cargo Fork (No-Load/Loaded)	m/s <sup>2</sup>	1/0.5
料箱规格尺寸 Specifications and Dimensions of Container	mm	600×400
料箱最小高度 Min. Height of Container	mm	100
货叉最大行程 Max. Stroke of Cargo Fork	mm	1400
定位精度 Positioning Accuracy	mm	±2
供电方式 Power Supply	/	无接触供电 Contactless Power Supply